




High Temperature Glass Fibre Media

M5 Specialist Filters

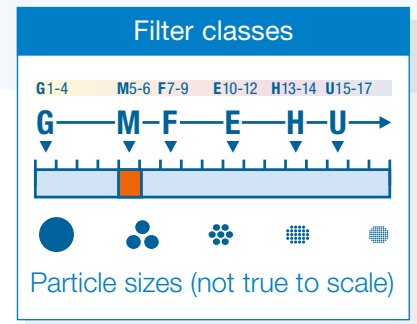

Cost effective and durable, our Glass Fibre Media products have been specifically designed to remove contaminants from air at high temperatures. They are used extensively in the final filtration of air in paint and drying units.

For first class final filtration, choose Glass Fibre Media from CFP.

THE KEY BENEFITS

1 Versatile

Available as rolls or pads, as a panel filter or with changing frame and in glass fibre or synthetic materials for all your painting and drying needs.

2 Durable

Temperature and humidity resistant, High Temperature Glass Fibre Media provide effective filtration in the most challenging paint and drying environments.

3 Environmentally-friendly

With no silicone or other lacquer harming substances, High Temperature Glass Fibre Media are environmentally friendly and easy to dispose of.



Painting & drying
technology

VERSIONS

- Precuts for finished dimensions: maximum width 1.53 m
- Standard rolls (GV180K/GV180G) e.g. 1.53 x 60 m
- Also available as panel filter or with changing frame